

Model specification

	Short	Medium	Long
Length (mm) (L)	4100 mm	4700 mm	5200 mm
Width (mm) (W)	1500 mm	1500 mm	1500 mm
Height (H)	2100 mm	2100 mm	2100 mm
Height with A/C (H1)	2350 mm	2350 mm	2350 mm
Length with cargo (L1)	4300 mm	4900 mm	5400 mm
Wheel base (U)	1900 mm	2500 mm	3000 mm
Cargo length (N)	2600 mm	3200 mm	3700 mm
Cargo height (D)	1550 mm	1550 mm	1550 mm
Cargo load level (C)	800 mm	800 mm	800 mm
Ground clearance (G1)	290 mm	290 mm	290 mm
Ground clearance (G2)	190 mm	190 mm	190 mm
Front clearance (M)	300 mm	300 mm	300 mm
Floor height (E)	600 mm	600 mm	600 mm
Front overhang (K)	1280 mm	1280 mm	1280 mm
Rear overhang with cargo (X)	1050 mm	1050 mm	1050 mm
Battery energy	from 8 kWh	12 kWh	16 kWh
Nominal Voltage	48/80 V	48/80 V	48/80 V

General

GVW up to **3.5 tons**
Load capacity up to **2 tons**
Drive power from **10 kW**
Drive distance up to **150 km**
Speed up to **50 km/h**

Unique options

Smart battery replacement system
Contactless recharge system
4WD, 4WS


Comfort and options

Cabin with 2 seats
Adjustable steering column
Heating system
Air condition system
Audio system
Rear camera
7" display
Parking Sensor
16" wheels

Power

The remote diagnostics and vehicle monitoring system
Fast recharge up to **80% in 1 hour / 8 kWh battery**

Technical lines

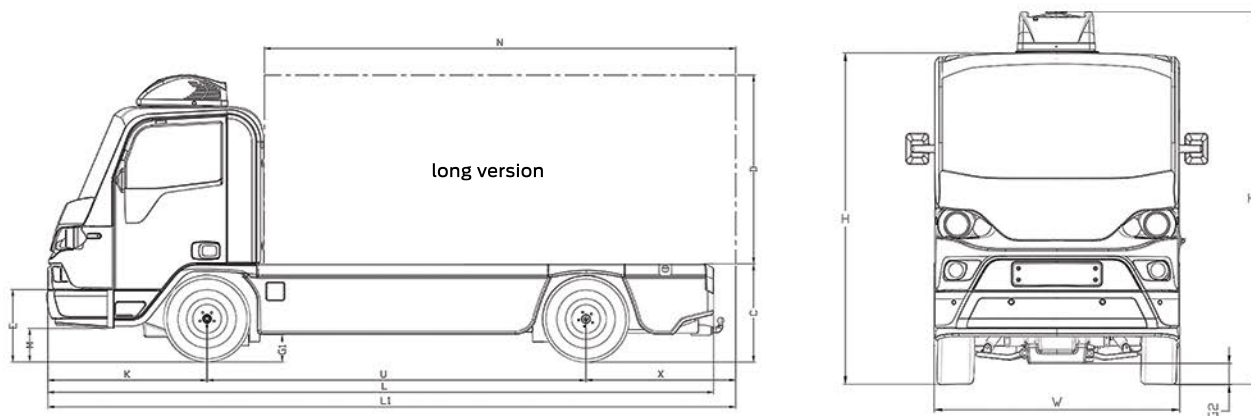

All information presented are preliminary and subject to change

melex®

Melex Sp.z.o.o
ul. Inwestorów 25
39-300 Mielec

tel: +48 17 773 81 00,
fax +48 17 773 81 01
e-mail : handel@melex.com.pl